



AWNING OVER TYPICAL FOOTPATH

NTS

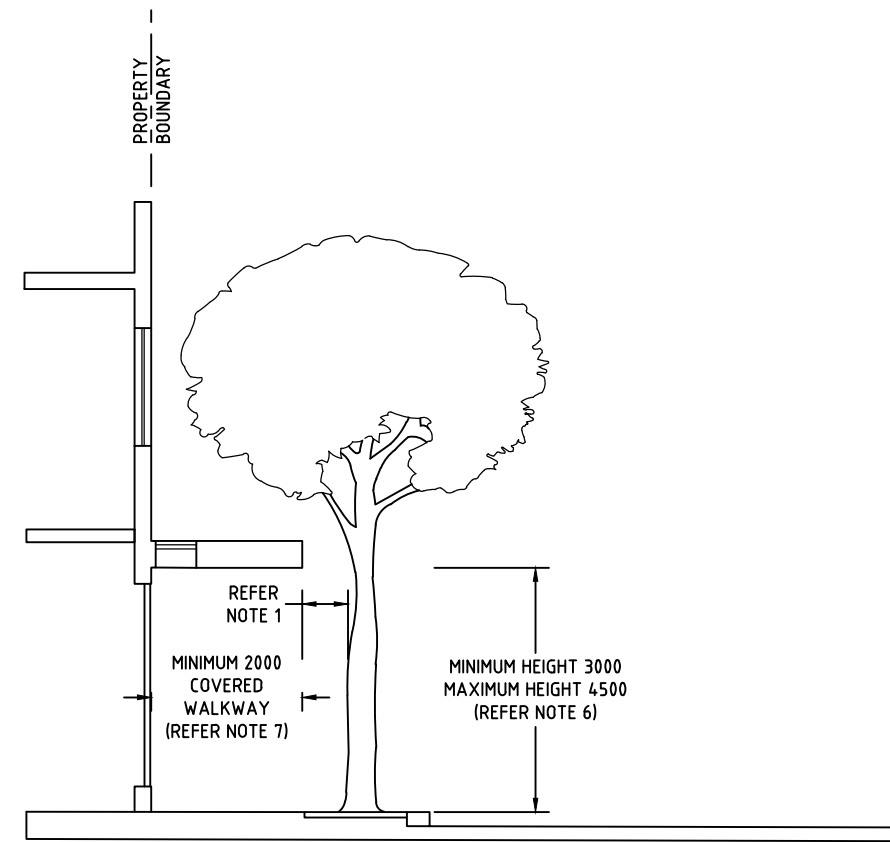

AWNING OVER TYPICAL FOOTPATH WITH TREE

NTS

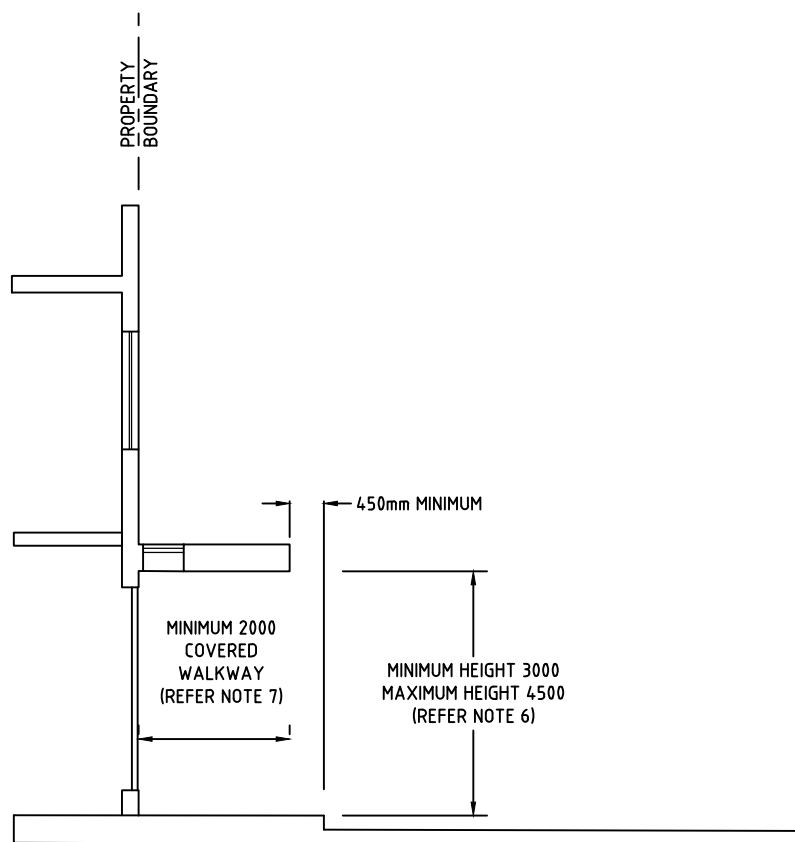

AWNING OVER TYPICAL FOOTPATH

NTS

NOTES

1. AWNING DISTANCE FROM TREE TO BE DETERMINED ON A CASE BY CASE BASIS.
2. THE AWNING IS TO BE SELF SUPPORTING UNLESS APPROVED OTHERWISE.
3. IF COLUMNS ARE APPROVED THEY SHALL ONLY PROVIDE STRUCTURAL SUPPORT TO THE AWNING, BALCONY OR VERANDAHS AND THE COLUMNS ARE TO BE AT LEAST 600mm FROM FACE OF KERB.
4. AWNINGS AND VERANDAHS SHALL BE RIGIDLY CLAD UNLESS APPROVED OTHERWISE.
5. ALL MATERIAL SHALL HAVE A MINIMUM SERVICE LIFE OF 20 YEARS UNLESS OTHERWISE APPROVED.
6. MAXIMUM HEIGHT TO BE 4500mm, HOWEVER WHERE SUITABLE THE MAXIMUM HEIGHT MAY BE INCREASED TO SUIT SURROUNDING CHARACTERISTICS.
7. MINIMUM COVERED WALKWAY TO BE 2000mm WIDE. AWNING WIDTH SHALL MATCH IN WITH ADJACENT AWNINGS. WHERE THE AWNING IS OVER A WIDE FOOTPATH IN EXCESS OF 3m (AS IN THE CBD) THE MINIMUM COVERED WALKWAY SHALL BE INCREASED TO COVER A MINIMUM OF 75% OF THE FOOTPATH.

AMENDMENTS				APPROVED BY DIRECTOR TECHNICAL SERVICES	STANDARD DRAWING				
No.	DESCRIPTION	DATE	INITIAL						
E				Brendan Dowd					
D									
C									
B									
A	INITIAL ISSUE	??-??							
				Date	SHEET	OF	SHEET SIZE. A1	AMENDT. A	DRAWING No. COD-130

